


Pro·Tek® Wall Protection Systems

Architectural Building Products Since 1945

CG-24 Polycarbonate Corner Guard

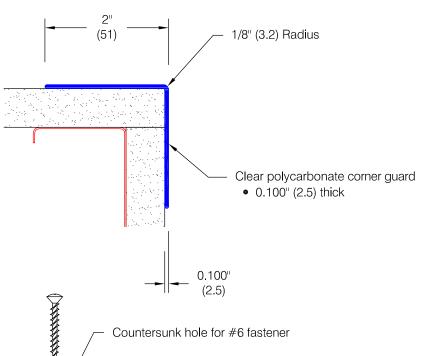

Features:

- Extruded Polycarbonate
- U/L 94 Flammability:

V-2@0.125

V-2 @ 0.0625

V-0 @ 0.2500


- Stock lengths 4'-0" (1219) and 8'-0" (2438)
- Custom lengths available
- Mechanical fasteners

Finishes:

- Clear #132 smooth finish
- Manufacturer's standard colors (optional)

Mounting Options:


- Double-faced tape
- Undrilled (fastening) method by others)

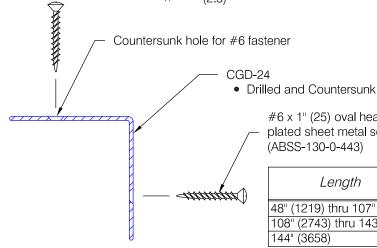

#6 x 1" (25) oval head chrome plated sheet metal screw (ABSS-130-0-443)

Length	Total # of Screws
48" (1219) thru 107" (2718)	6
108" (2743) thru 143" (3632)	8
144" (3658)	10


Standard Screw Mounted



Optional Tape Mounted (Specify CGT-24)



Optional Undrilled (Specify CGU-24)

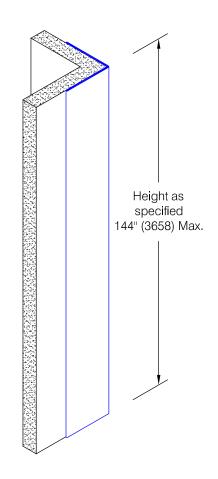

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer:	Project :	WD.119.0c
Architect :	Sales Rep :	