

CG-25 Clear Polycarbonate Corner Guard

Features:


- Extruded Polycarbonate
- U/L 94 Flammability:
 - V-2 @ 0.125
 - V-2 @ 0.0625
 - V-0 @ 0.2500
- Stock lengths 4'-0" (1219) and 8'-0" (2438)
- Custom lengths available
- Mechanical fasteners

Finishes:


- Clear #132 smooth finish
- Manufacturer's standard colors (optional)

Mounting Options:


- Double-faced tape
- Undrilled (fastening method by others)

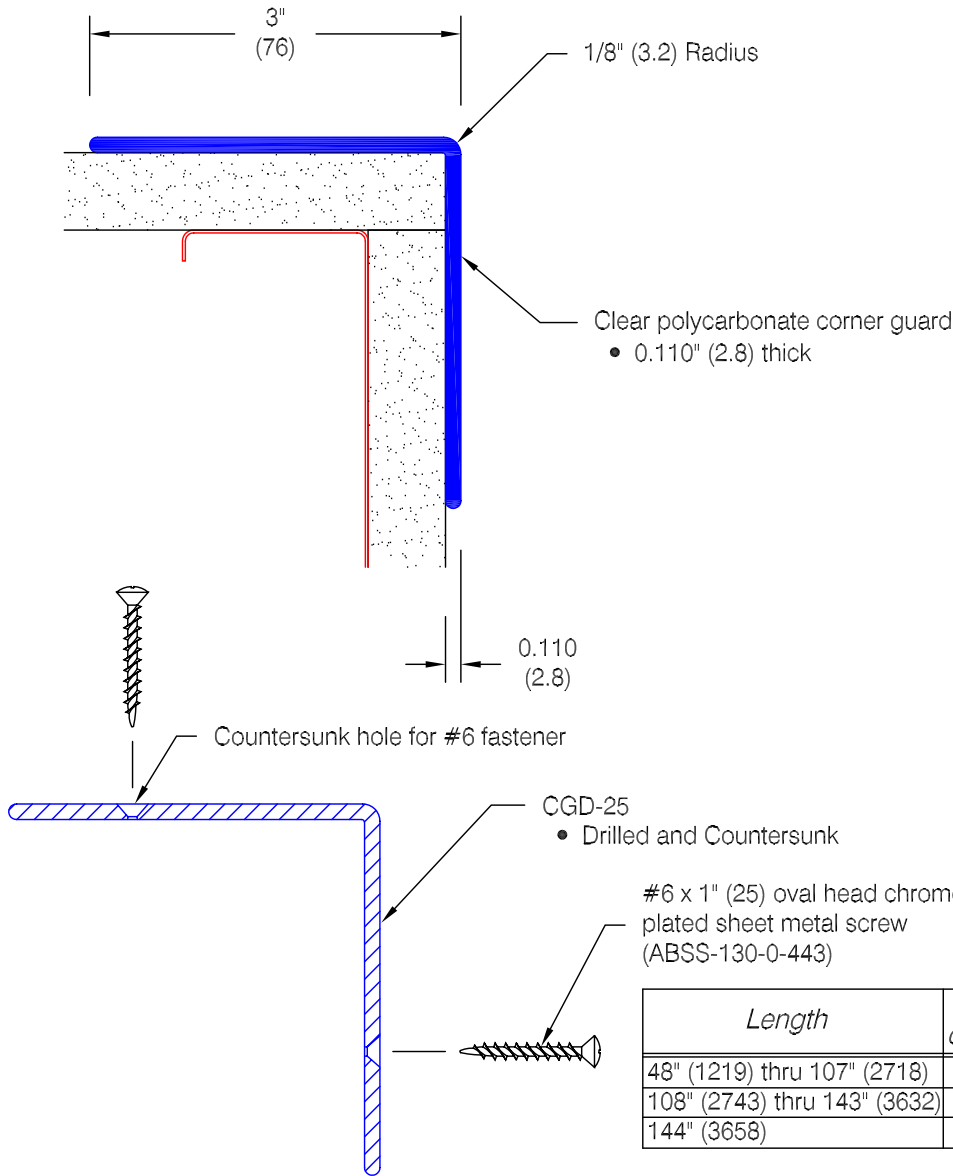


| Length | Total # of Screws |
|------------------------------|-------------------|
| 48" (1219) thru 107" (2718) | 6 |
| 108" (2743) thru 143" (3632) | 8 |
| 144" (3658) | 10 |

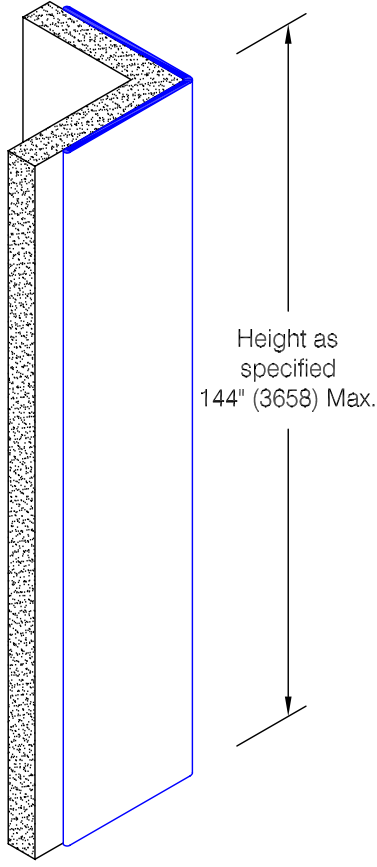

Standard Screw Mounted

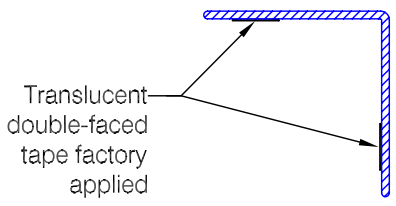

Optional Tape Mounted
(Specify CGT-25)



Optional Undrilled
(Specify CGU-25)

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

| | | |
|-------------|-------------|-----------|
| Customer : | Project : | WD.120.0b |
| Architect : | Sales Rep : | |