



EM-22 Berber Carpet Tiles

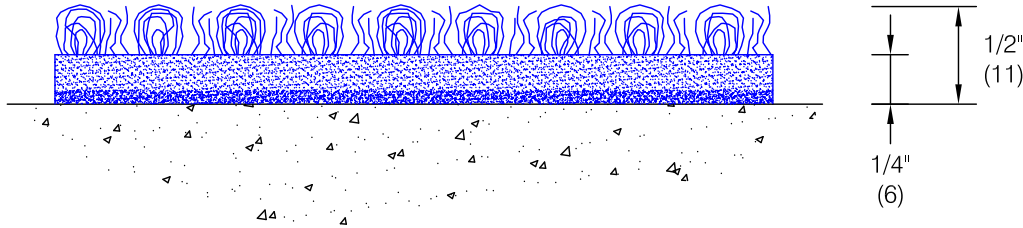

* Traffic can run parallel or perpendicular to carpet pattern. Tiles that are butt together must be installed with carpet pattern in the same direction.

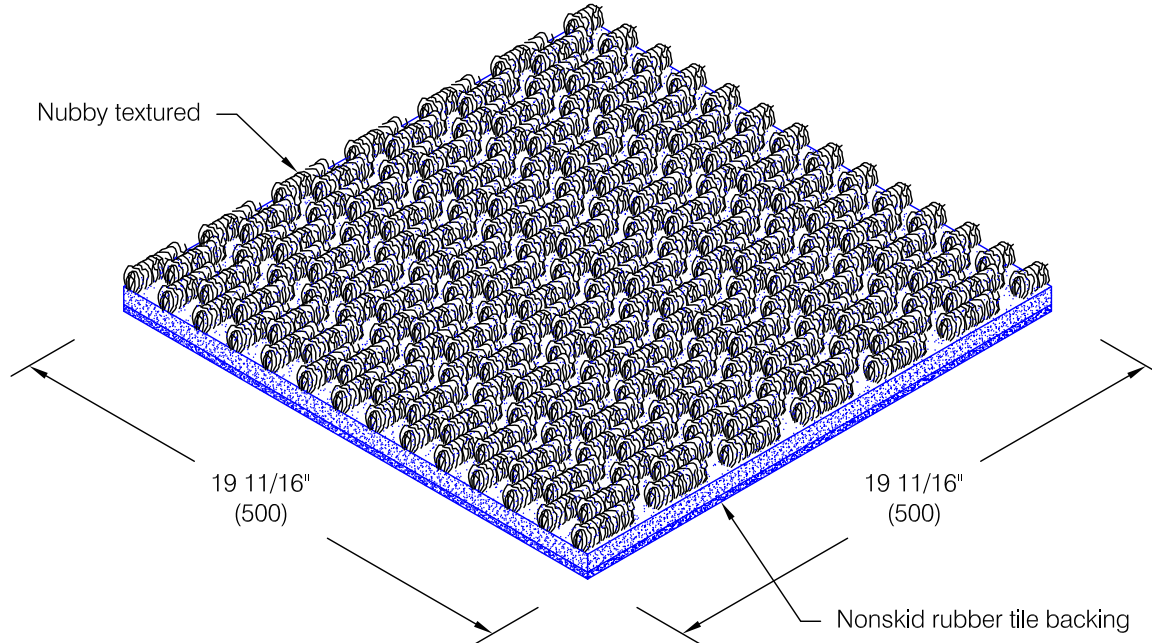

Features:

- Nonwoven needle punched
- Polypropylene blend of 17-240 dtex per filament fiber
- Pile weight: 52 oz / sq yd
- Thickness: 1/2" (13)
- Packaging: 12-tiles per carton, 32 lbs / carton
- Flammability: DOC FF-1-70 and FF-2-70
- Static coefficient of friction: Dry 0.53; wet 0.96 (ASTM D-2047)


Installation Options:

- Adhesive applied ADH-40 nonflammable

Colors:

- Manufacturer's standard colors

Optional Framing:

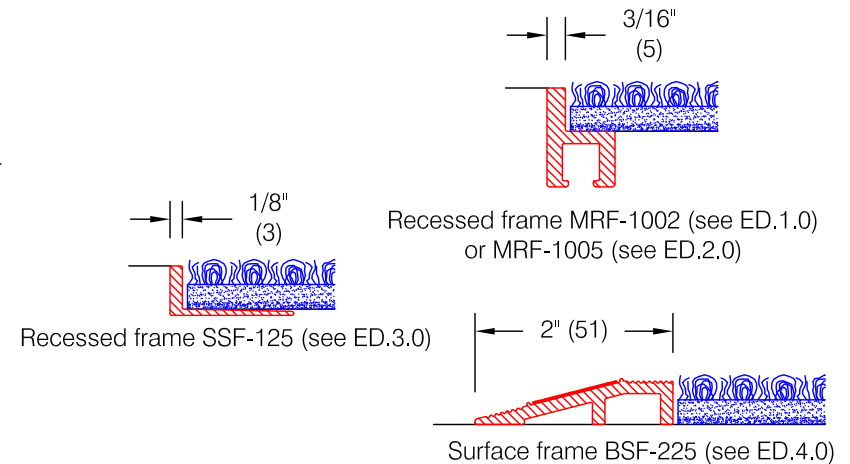

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.49.1b