


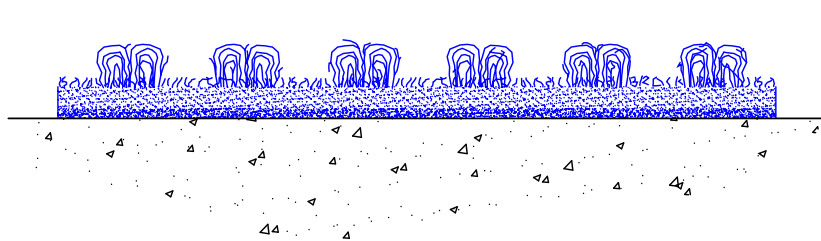



EM-50 Jaguar Carpet Matting




**Traffic must run perpendicular to carpet pattern.
 Carpets that are butted together must be installed
 with carpet pattern in the same direction.**

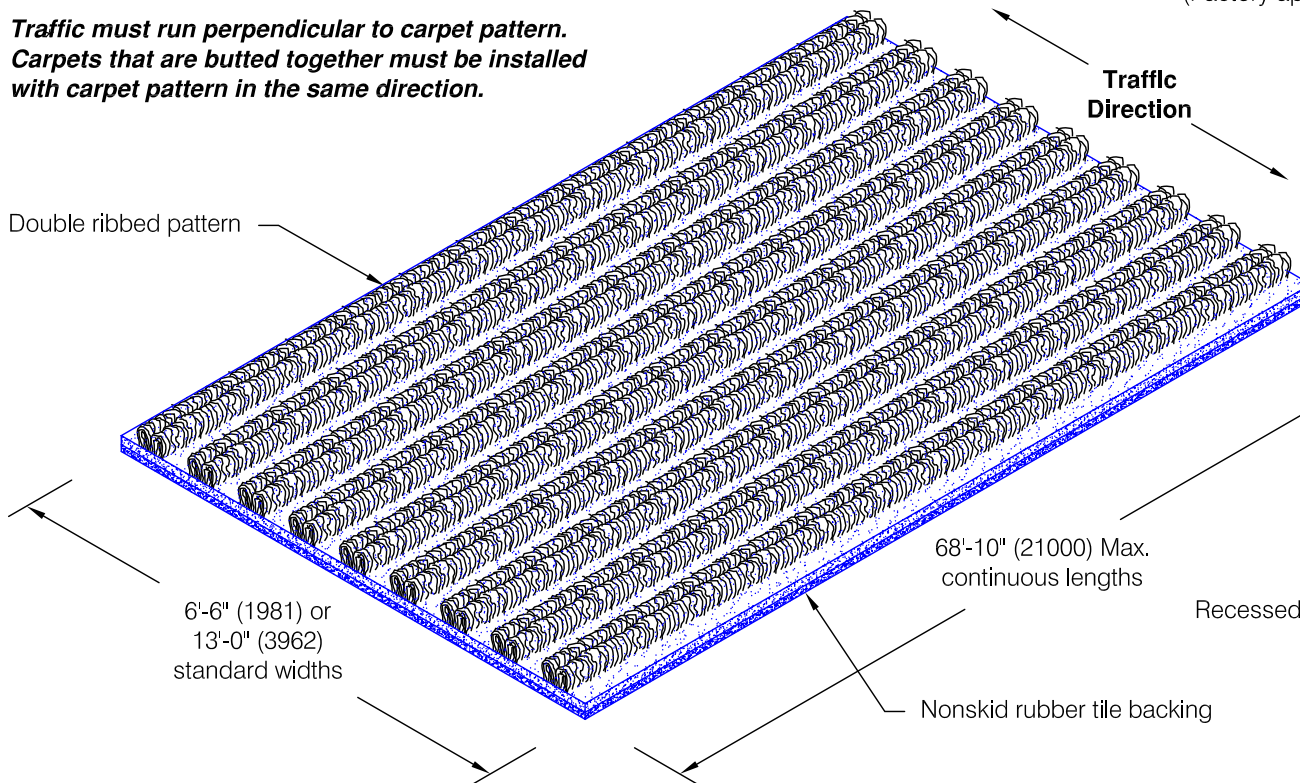

Recessed frame SSF-125 (see ED.3.0)



Recessed frame MRF-1002 (see ED.1.0)
 or MRF-1005 (see ED.2.0)

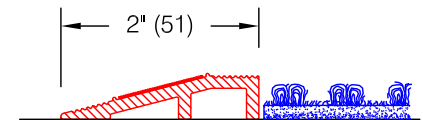

Surface frame BSF-225 (see ED.4.0)

Features:

- Needled
- Polypropylene heavy denier
- Pile weight: 38 oz / sq yd
- Thickness: 3/8" (10)
- Weight: 0.54 lbs / sq ft
- Flammability: DOC FF-1-70 and FF-2-70
- Static coefficient of friction: Dry 0.53; wet 0.67 (ASTM D-2047-82)

Installation Options:

- Adhesive applied ADH-40
- Double-faced tape
- Optional factory applied vinyl bevel nosing EMA-43

Colors:

- Manufacturer's standard colors

Optional Framing:

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.51.0d