


0.059" (1.5)

Pro·Tek® Wall Protection Systems

Architectural Building Products Since 1945

KPS-16 Kick Plates

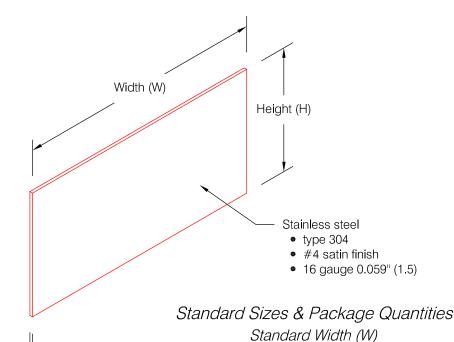

Features:

- Custom sizes are available
- Type 316, 430 stainless available

Mounting Options:


 Standard mounting Adhesive:

ADH-50 adhesive supplied separately

 Optional mounting Drilled:

> Clearance holes for ABSS-112 #8 x 3/4" (19) oval head sheet metal screw and ABCW-132 stainless cup washer supplied separately as required

7		24	32	48
Standard Height (H)	6	<i>24</i> 16	<i>32</i> 12	8
	8	12	9	6
	12	8	6	4
	16	6	9	3
	24	4	3	2
	16 24 32 48	3	3	1
	48	2	1	1



# of holes	kick plate size
6	24 x 6 to 24 x 16
8	24 x 24, 32 x 6 to 32 x 16, 48 x 6 to 48 x 16
10	32 x 24 to 48 x 24, 24 x 32, 24 x 48
12	32 x 32 to 48 x 48

^{*}Dimensions are specified as Width x Height

Optional Drilling

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer:	Project :	WD 146 0h
Architect:	Sales Rep :	WD. 140.00