


Pro•Tek® Wall Protection Systems

Architectural Building Products Since 1945

CG-12P Corner Guard

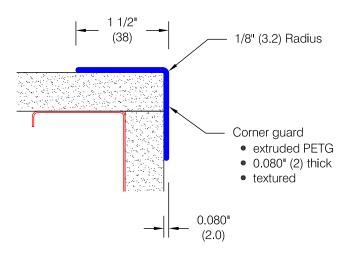

1/2" (13) Countersunk hole for #6 fastener

Optional Drilling:

• Standard spacing: 1" (25) from each end and spaced evenly not to exceed 36" (914) oc

Features:

- PVC-Free materials
- Class A fire rating
- Stock lengths:
 4'-0" (1219), 8'-0" (2438) & 12'-0" (3658)

Finishes:

- Manufacturer's standard colors
- Custom colors available


Mounting Options:

- Adhesive
 - ADH-30 adhesive supplied separately
- Drilled

Countersunk holes for ABSS-134 #6 x 1 1/2" (38) oval head sheet metal screw supplied separately as required

Taped

ADH-4042 double sided adhesive tape factory applied to corner guard

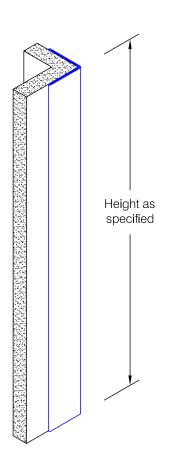

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer:	Project :	WD 110D 0
Architect :	Sales Rep :	VVD. TUP.U