

CG-55-Endwall Stainless End Guard

Features:

- Custom lengths, angles, and wing sizes are available
- Minimum partition width: 4 7/8" (124)
- Type 304 stainless steel

Mounting Options:

- Standard mounting
Adhesive:

ADH-50 adhesive included


- Optional mounting
Standard Drilling:

Clearance holes for #8 fastener.


ABSS-113, #8 x 1 1/2" (38) oval head sheet metal screw and ABCW-132 stainless cup washer supplied separately as required.

Countersunk Drilling:

Countersunk holes for #6 fastener. ABSS-134, #6 x 1 1/2" (38) oval head sheet metal screw supplied separately as required.

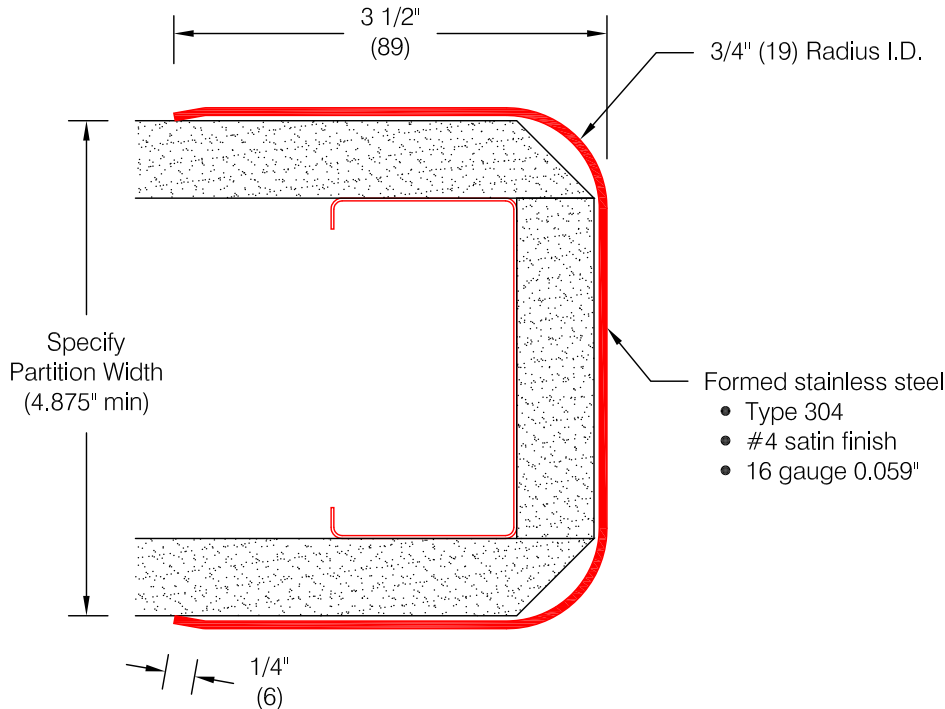

3/4" (19) Optional clearance hole for #8 or countersunk hole for #6, see mounting options above

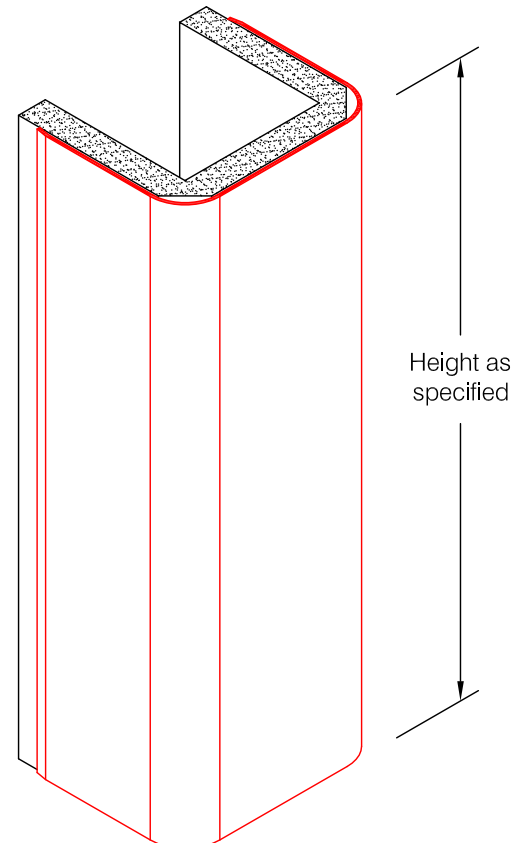

Spacing for optional drilling:

- Standard spacing: 3" (76) from each end and spaced evenly not to exceed 36" (914) oc

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

| | | |
|-------------|-------------|-----------|
| Customer : | Project : | WD.124.1c |
| Architect : | Sales Rep : | |