

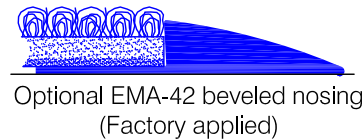



## EM-40 Protector Carpet Matting

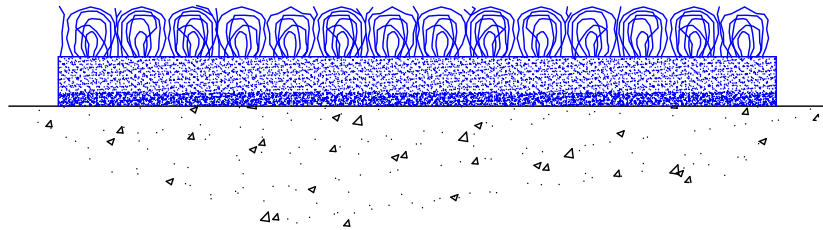

**Traffic can run parallel or perpendicular to carpet pattern. Carpets that are butted together must be installed with carpet pattern in the same direction.**

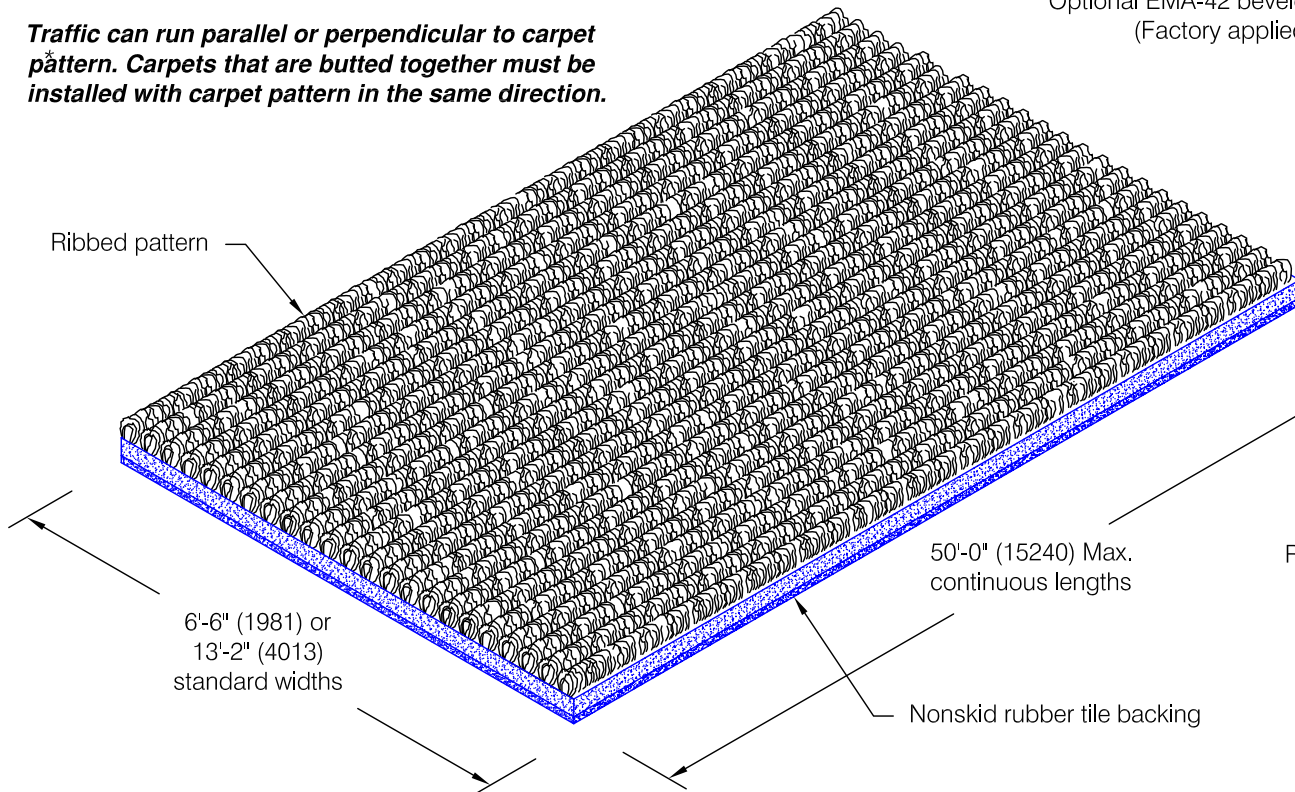

### Features:

- Nonwoven needle punched
- Polypropylene blend of 17-240 dtex per filament fiber
- Pile weight: 52 oz / sq yd
- Thickness: 1/2" (13)
- Weight: 0.65 lbs / sq ft
- Flammability: DOC FF-1-70 and FF-2-70
- Static coefficient of friction: Dry 0.41; wet 0.69 (ASTM D-2047)


### Installation Options:

- Adhesive applied ADH-40 nonflammable
- Edge guard FCAC-14 (see ED.59.0)
- Optional factory applied vinyl bevel nosing EMA-42

### Colors:

- Manufacturer's standard colors

### Optional Framing:

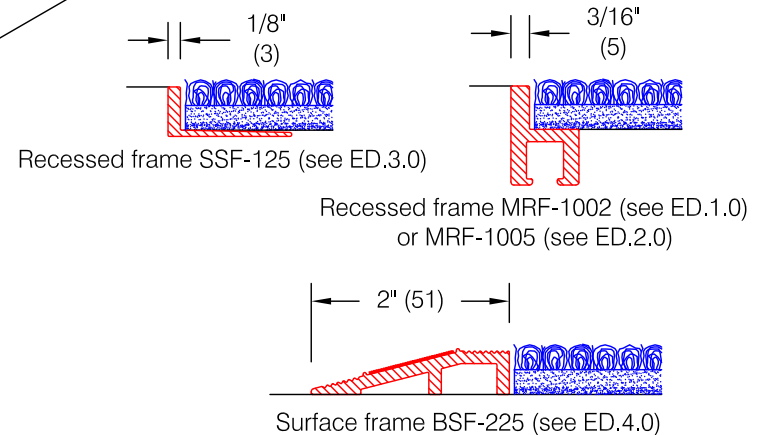

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.50.0d