




EM-70-OD Tire Mat Entrance Matting

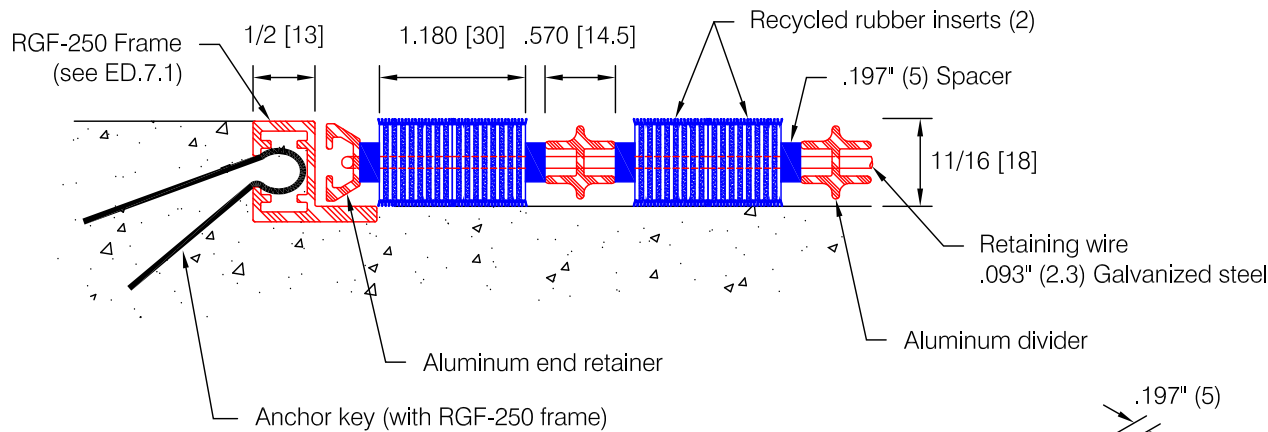


* **Note On Dimensions:**
Pawling requires that exact mat opening dimensions be provided. Factory will fabricate mats 3/16" (4.8) smaller than exact opening dimensions to allow for proper fit.

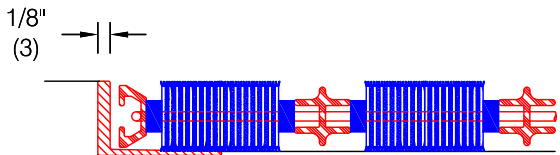

Optional recessed frame SSF-250, see ED.7.2

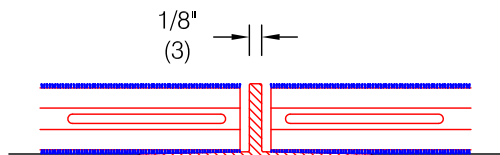

Divider SSF-250T
 (between left-to-right sections)

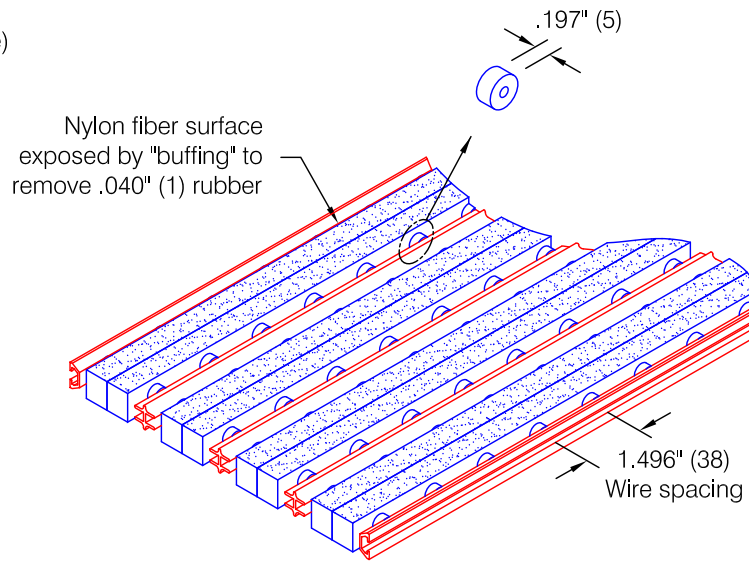

"OD" : Open Construction, Double Insert

Features:

- Inserts:
 Recycled content 100% post-consumer
- Reversible for extended life
- Weight: 3.31 lbs/sqft


Finishes:

- Aluminum profiles:
 Mill finish (standard) #405
 Clear anodized #403
- Insert: Natural Gray #17
- Wire: Cold galvanized, 30-35 micron

Construction:

- Open construction with .197" (5) spacer, and double insert. Dirt falls between profiles.
- Manufacturing process prevents exact alignment of aluminum profiles and rubber inserts between adjacent sections

Sectioning information:

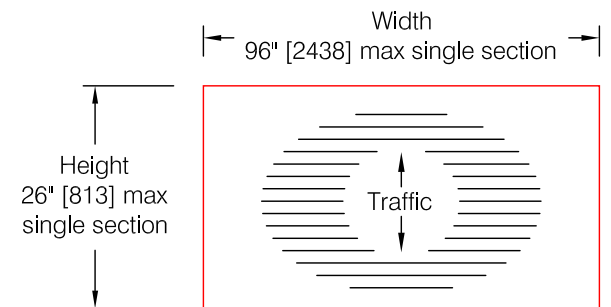

* **Mats over 16 square feet may require sectioning as determined by the factory**

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.74.1b