



## EM-70-OS Tire Mat Entrance Matting

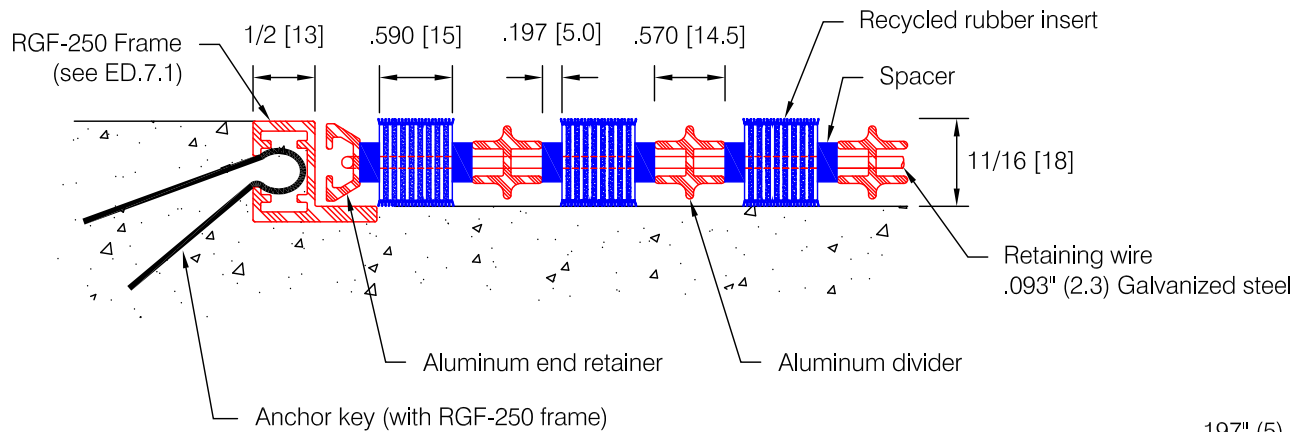


**\* Note On Dimensions:**


**Pawling requires that exact mat opening dimensions be provided. Factory will fabricate mats 3/16" (4.8) smaller than exact opening dimensions to allow for proper fit.**

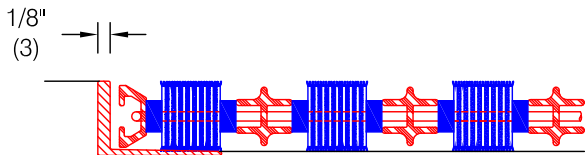

Optional recessed frame SSF-250, see ED.7.2

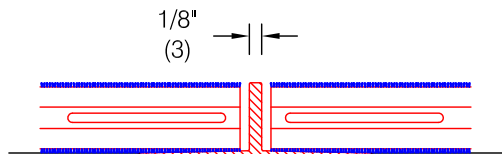

Divider SSF-250T (between left-to-right sections)

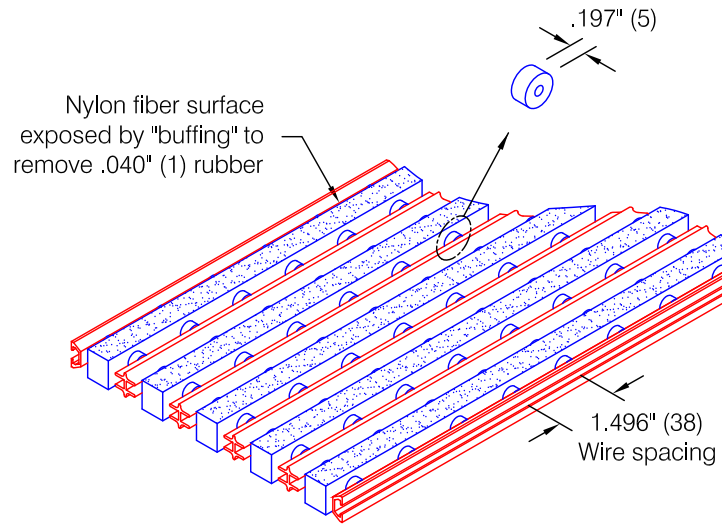

"OS" : Open Construction, Single Insert

**Features:**

- Inserts:  
Recycled content 100% post-consumer
- Reversible for extended life
- Weight: 3.2 lbs/sqft


**Finishes:**

- Aluminum profiles:  
Mill finish (standard) #405  
Clear anodized #403
- Insert: Natural Gray #17
- Wire: Cold galvanized, 30-35 micron

**Construction:**

- Open construction with .197" (5) spacer, and single insert. Dirt falls between profiles.
- Manufacturing process prevents exact alignment of aluminum profiles and rubber inserts between adjacent sections

**Sectioning information:**

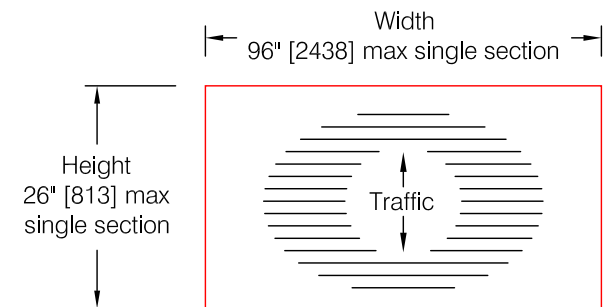

**\* Mats over 16 square feet may require sectioning as determined by the factory**

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.73.1a