



KPV-60 Kick Plates

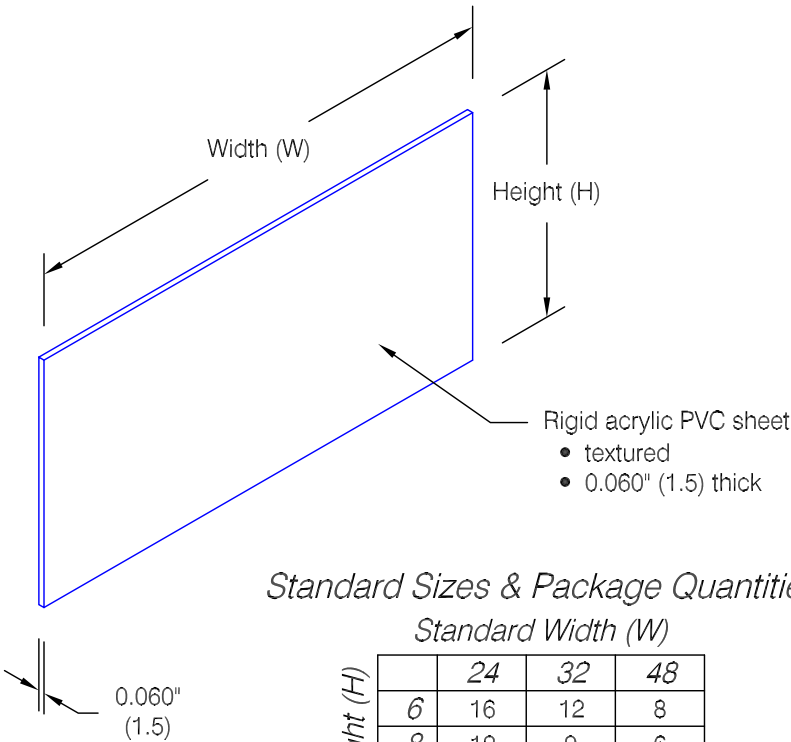

Standard Sizes & Package Quantities

Standard Width (W)

	24	32	48
Standard Height (H)			
6	16	12	8
8	12	9	6
12	8	6	4
16	6	9	3
24	4	3	2
32	3	3	1
48	2	1	1

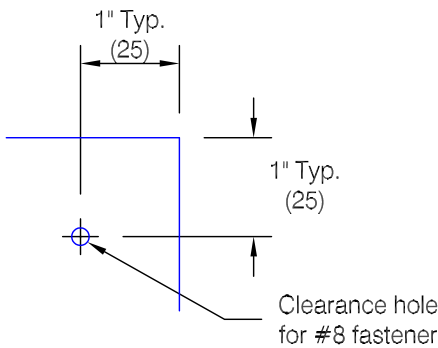

# of holes	kick plate size
6	24 x 6 to 24 x 16
8	24 x 24, 32 x 6 to 32 x 16, 48 x 6 to 48 x 16
10	32 x 24 to 48 x 24, 24 x 32, 24 x 48
12	32 x 32 to 48 x 48

*Dimensions are specified as Width x Height

Optional Drilling

Features:

- Class A fire rating
- NFPA-252 (UL10b) approved for use on 90 minute wood and 180 minute steel fire rated door assemblies

Finishes:


- Manufacturer's standard colors
- Custom colors available

Mounting Options:

- Adhesive
ADH-30 adhesive supplied separately for use on metal and wood doors
- Drilled
Clearance holes for ABSS-112 #8 x 3/4" (19) oval head sheet metal screw and ABCW-132 stainless cup washer supplied separately as required
- Taped
ADH-4042 double sided adhesive tape factory applied to kick plate

Beveled Edge Option:

- Includes chamfered left, top and right edges
custom configurations of beveled edges are available upon request

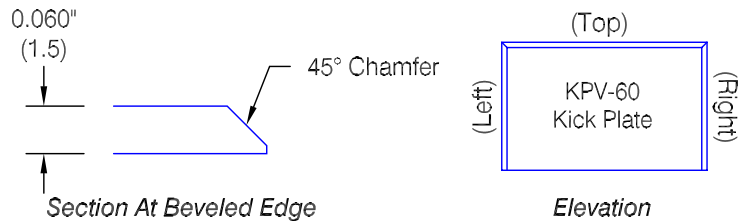

Optional Beveling

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	WD.139.0a
Architect :	Sales Rep :	