


# RG-500 Drain-Well<sup>®</sup> Corrugated Aluminum Insert

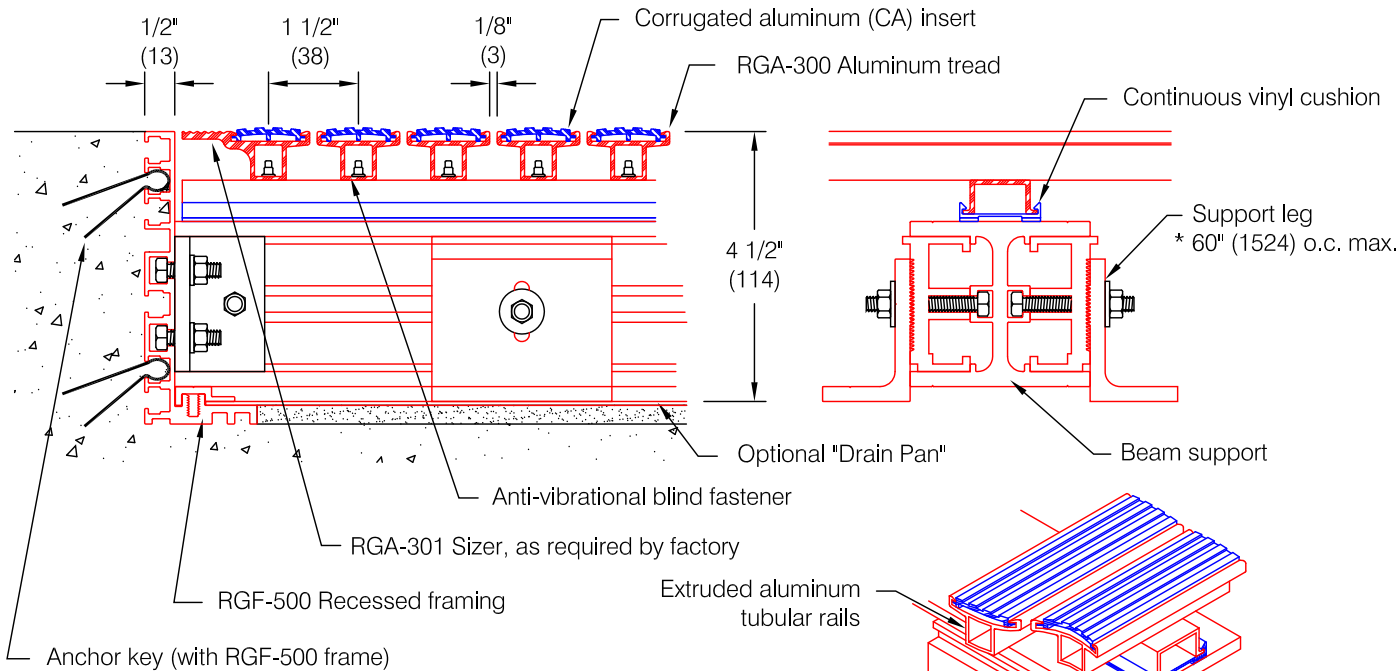



### Features:

- Extruded aluminum treads and cross supports alloy 6105-T5
- Continuous dual-durometer vinyl cushion for superior noise reduction
- 4 1/2" (114) deep for increased drainage ability
- Tubular tread rails for increased strength
- Anti-vibrational fasteners for sturdy, long-life service
- Single section width to 144" (3658)
- Static Coefficient of Friction (ASTM D-2047-82)  
Dry: 0.61, Wet: 0.92
- Optional clear anodized drain pan (actual drain by others, if required)

### Finishes:

- Aluminum tread:
  - Mill finish (standard) #405
  - Medium bronze anodized #404
  - Clear anodized #403
  - Black anodized #462
- Aluminum cross supports:
  - Mill finish #405
- Corrugated aluminum insert alloy 6105-T5:
  - Mill finish (standard) #405

### Sectioning information:

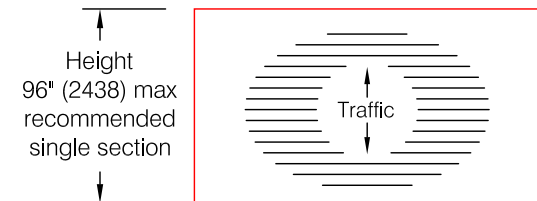

\* Mats over 48 square feet may require sectioning as determined by the factory

### Note On Dimensions:

\* Pawling requires that exact mat opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.

\* Support leg (used for mats exceeding 60" (1524) front to back)

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	ED.33.4b
Architect :	Sales Rep :	