


EM-500 Rol-Dek[®] Corrugated Aluminum Insert

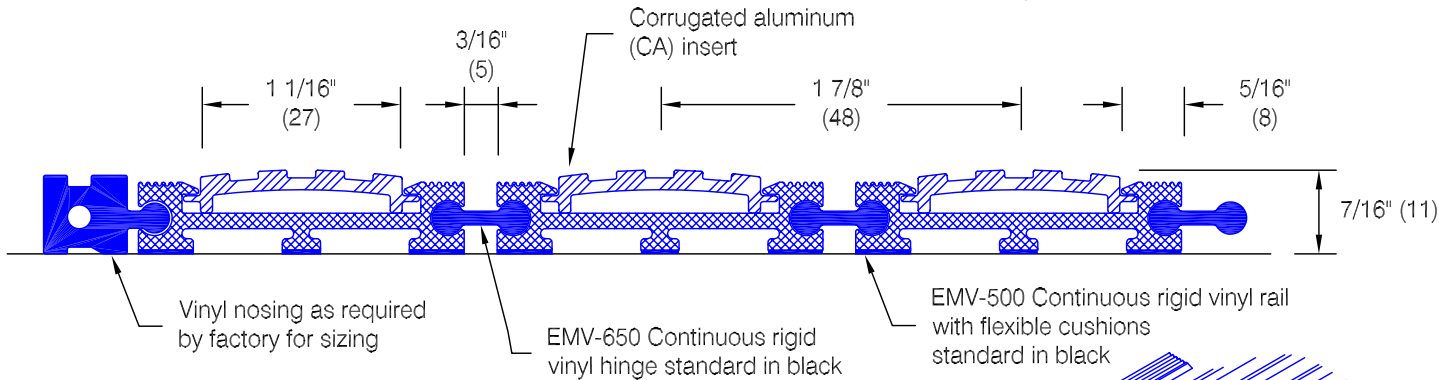

Features:


- Continuous vinyl hinge and cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Perforated hinge for added drainage
- Single section width to 144\" (3658)
- Static Coefficient of Friction (ASTM D-2047-82)
 Dry: 0.61, Wet: 0.92

Finishes:


- Vinyl rail and hinge: Black
- Corrugated aluminum insert alloy 6105-T5: Mill finish (standard) #405

Optional Framing:


*** Pawling requires that exact opening dimensions be provided. Factory will fabricate mats 1/4\" (6) smaller than exact opening dimensions to allow for proper fit.**

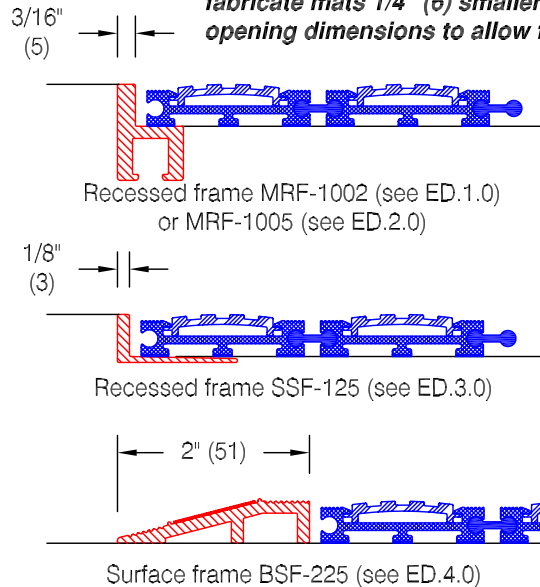


Hinge Details:



Optional Nosings:

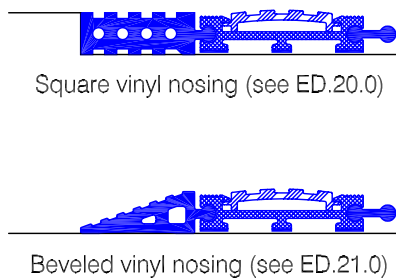

Sectioning information:

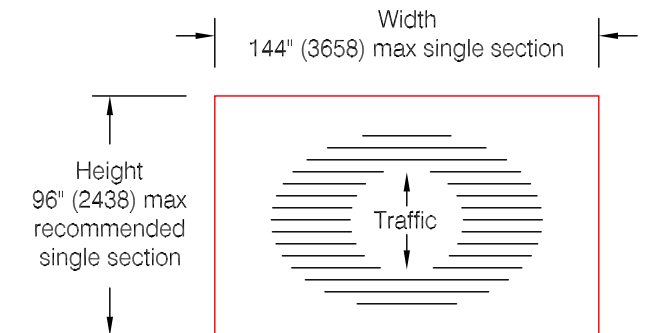

*** Mats over 48 square feet may require sectioning as determined by the factory**

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :	Project :	ED.19.4b
Architect :	Sales Rep :	