



EM-72-CS Tire Mat Entrance Matting

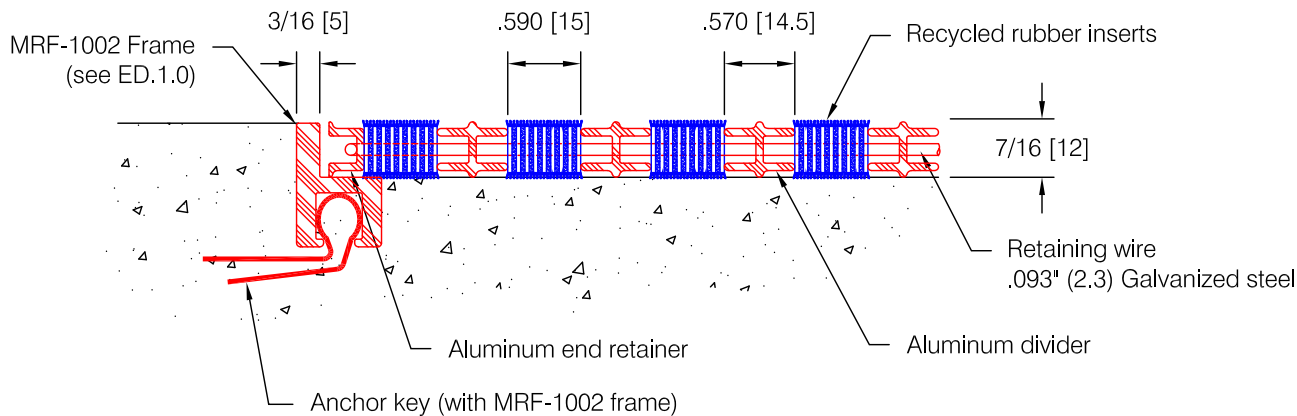


*** Note On Dimensions:**

Pawling requires that exact mat opening dimensions be provided. Factory will fabricate mats 3/16" (4.8) smaller than exact opening dimensions to allow for proper fit.

Nylon fiber surface exposed by "buffing" to remove .040" (1) rubber

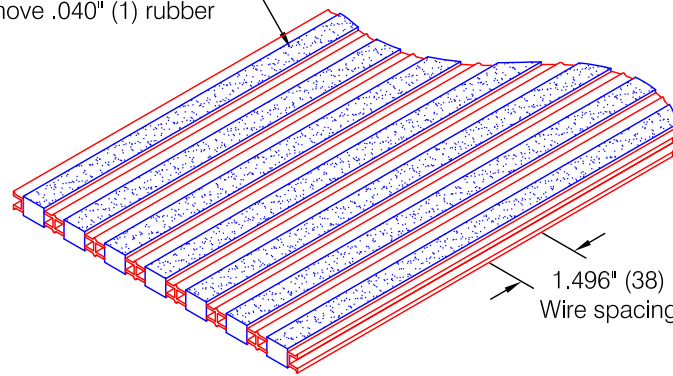

"CS" : Closed Construction, Single Insert

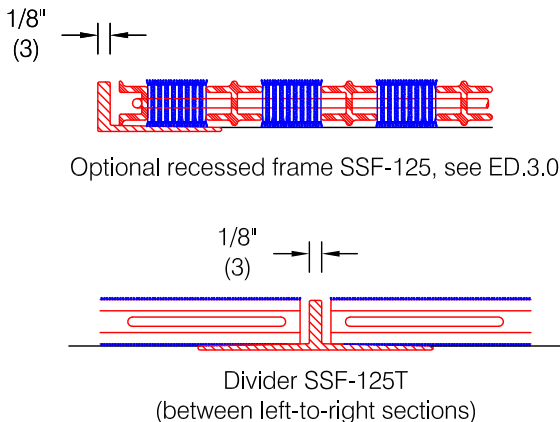

Features:

- Inserts: Recycled content 100% post-consumer
- Reversible for extended life
- Weight: 2.6 lbs/sqft


Finishes:

- Aluminum profiles: Mill finish (standard) #405
Clear anodized #403
- Insert: Natural Gray #17
- Wire: Cold galvanized, 30-35 micron

Construction:

- Closed construction and single insert. Dirt and debris remain on surface for cleaning
- Manufacturing process prevents exact alignment of aluminum profiles and rubber inserts between adjacent sections

Sectioning information:

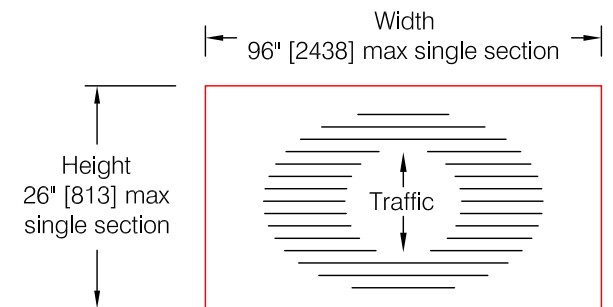

*** Mats over 16 square feet may require sectioning as determined by the factory**

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.75.0