

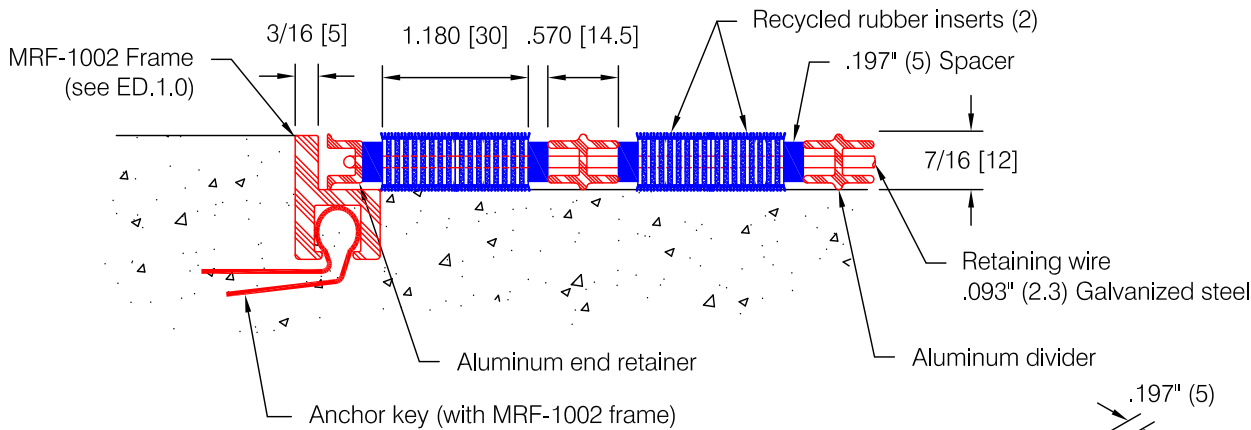
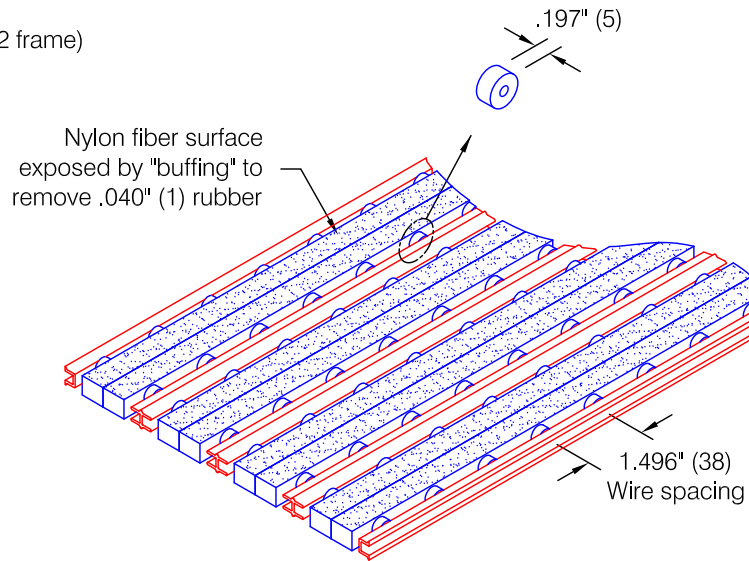


## EM-72-OD Tire Mat Entrance Matting

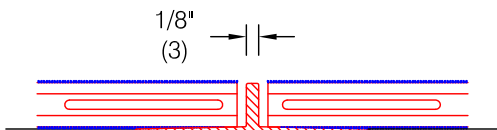

\* **Note On Dimensions:**  
**Pawling requires that exact mat opening dimensions be provided. Factory will fabricate mats 3/16" (4.8) smaller than exact opening dimensions to allow for proper fit.**

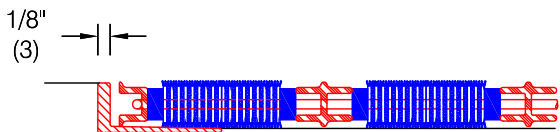

"OD" : Open Construction, Double Insert

### Features:

- Inserts:  
Recycled content 100% post-consumer
- Reversible for extended life
- Weight: 2.5 lbs/sqft


### Finishes:

- Aluminum profiles:  
Mill finish (standard) #405  
Clear anodized #403
- Insert: Natural Gray #17
- Wire: Cold galvanized, 30-35 micron

### Construction:

- Open construction with .197" (5) spacer, and double insert. Dirt falls between profiles.
- Manufacturing process prevents exact alignment of aluminum profiles and rubber inserts between adjacent sections

### Sectioning information:

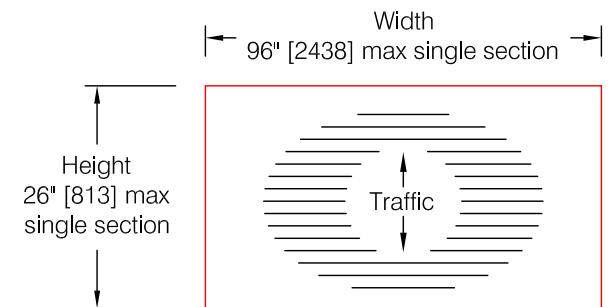

\* **Mats over 16 square feet may require sectioning as determined by the factory**

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.76.1