



EM-72-OS Tire Mat Entrance Matting

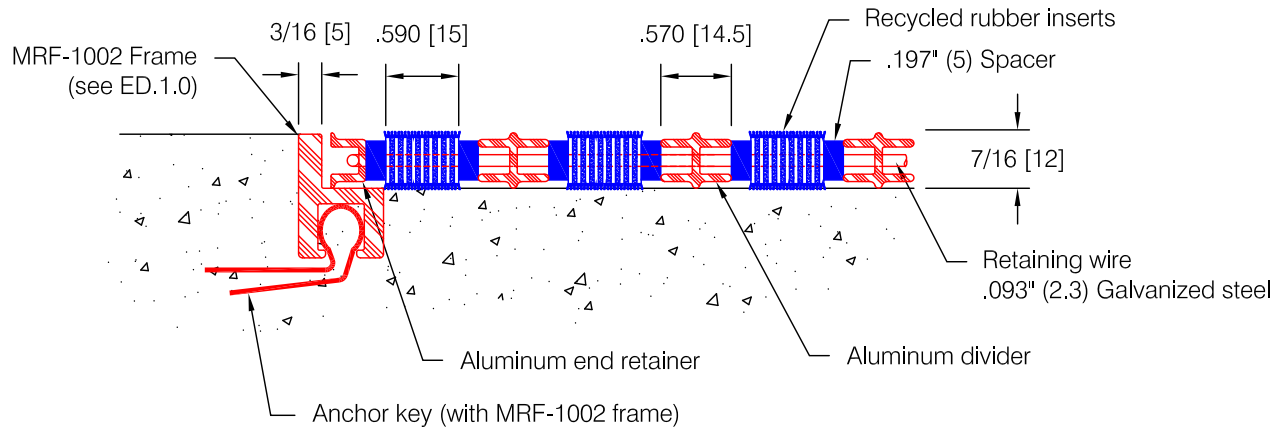


*** Note On Dimensions:**


Pawling requires that exact mat opening dimensions be provided. Factory will fabricate mats 3/16" (4.8) smaller than exact opening dimensions to allow for proper fit.

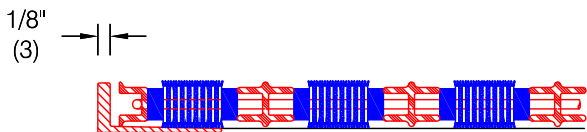

Optional recessed frame SSF-125, see ED.3.0

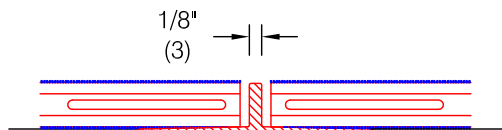

Divider SSF-125T
(between left-to-right sections)

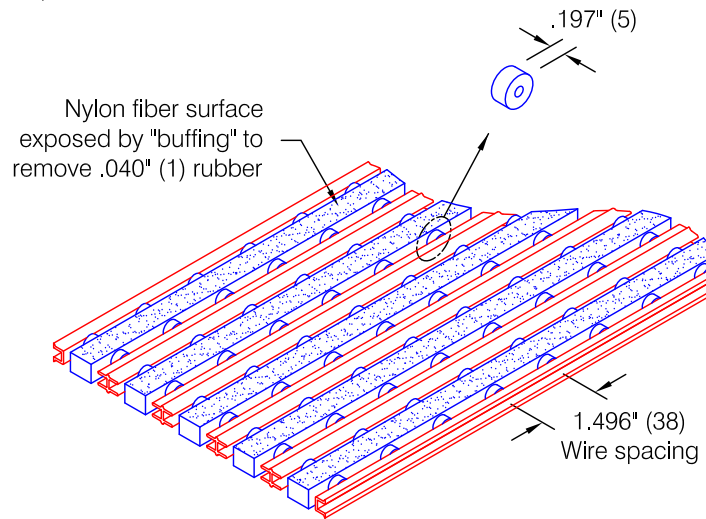

"OS" : Open Construction, Single Insert

Features:

- Inserts:
Recycled content 100% post-consumer
- Reversible for extended life
- Weight: 2.4 lbs/sqft


Finishes:

- Aluminum profiles:
Mill finish (standard) #405
Clear anodized #403
- Insert: Natural Gray #17
- Wire: Cold galvanized, 30-35 micron

Construction:

- Open construction with .197" (5) spacer, and single insert. Dirt falls between profiles.
- Manufacturing process prevents exact alignment of aluminum profiles and rubber inserts between adjacent sections

Sectioning information:

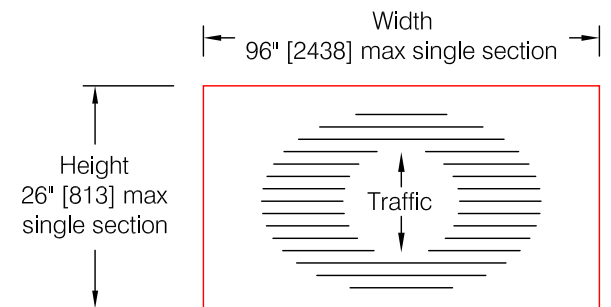

*** Mats over 16 square feet may require sectioning as determined by the factory**

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.75.1