


Pro•Tek® Wall Protection Systems

Architectural Building Products Since 1945

KPP-60 Kick Plates

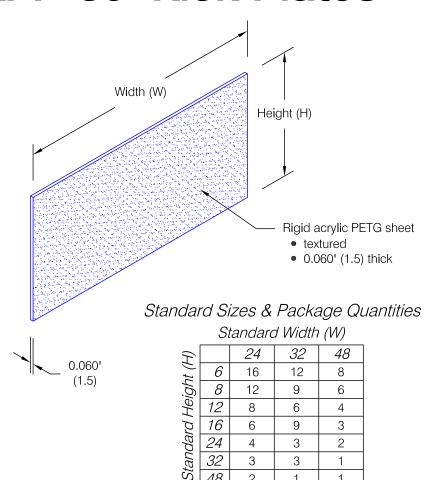

16

24

32

48

6

4

3

Features:

- Class A fire rating
- NFPA-252 (UL10b) approved for use on 90 minute wood and 180 minute steel fire rated door assemblies

Finishes:

- Manufacturer's standard colors
- Custom colors available

Mounting Options:

Adhesive


ADH-30 adhesive supplied separately for use on metal and wood doors

Drilled

Clearance holes for ABSS-112 #8 x 3/4" (19) oval head sheet metal screw and ABCW-132 stainless cup washer supplied separately as required

Taped

ADH-4042 double sided adhesive tape factory applied to kick plate



# of holes	kick plate size
6	24 x 6 to 24 x 16
8	24 x 24, 32 x 6 to 32 x 16, 48 x 6 to 48 x 16
10	32 x 24 to 48 x 24, 24 x 32, 24 x 48
12	32 x 32 to 48 x 48

Optional Drilling

*Dimensions are specified as Width x Height

Beveled Edge Option:

• Includes chamfered left, top and right edges custom configurations of beveled edges are available upon request



Optional Beveling

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

3

2

1

9

3

3

Customer:	Project :	WD 130P 0
Architect:	Sales Rep:	109F.U