
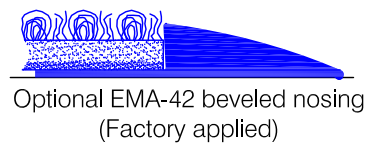



EM-20 Berber Carpet Matting

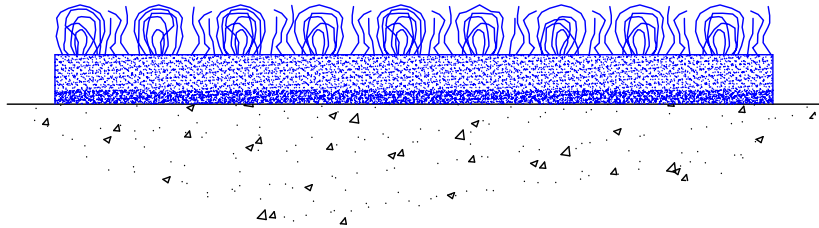

* Traffic can run parallel or perpendicular to carpet pattern. Carpets that are butted together must be installed with carpet pattern in the same direction.

Features:

- Polypropylene fibers, 100% Asota® solution-dyed UV stabilized
- Product weight: 93 oz / sq yd
- Pile weight: 52 oz / sq yd
- Thickness: 1/2" (13)
- OxForce™ high density rubber backing
- Weight: 0.65 lbs / sq ft
- Flammability: CPSC FF-1-70 Pass
- Static coefficient of friction: Dry 0.53; wet 0.96 (ASTM D-2047)


Installation Options:

- Adhesive applied ADH-40 nonflammable
- Optional factory applied vinyl beveled nosing (EMA-42)


Colors:

- Manufacturer's standard colors


Optional Framing:




Recessed frame MRF-1002 (see ED.1.0) or MRF-1005 (see ED.2.0)



Recessed frame SSF-125 (see ED.3.0)

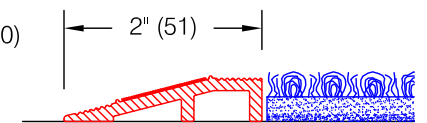

Surface frame BSF-225 (see ED.4.0)

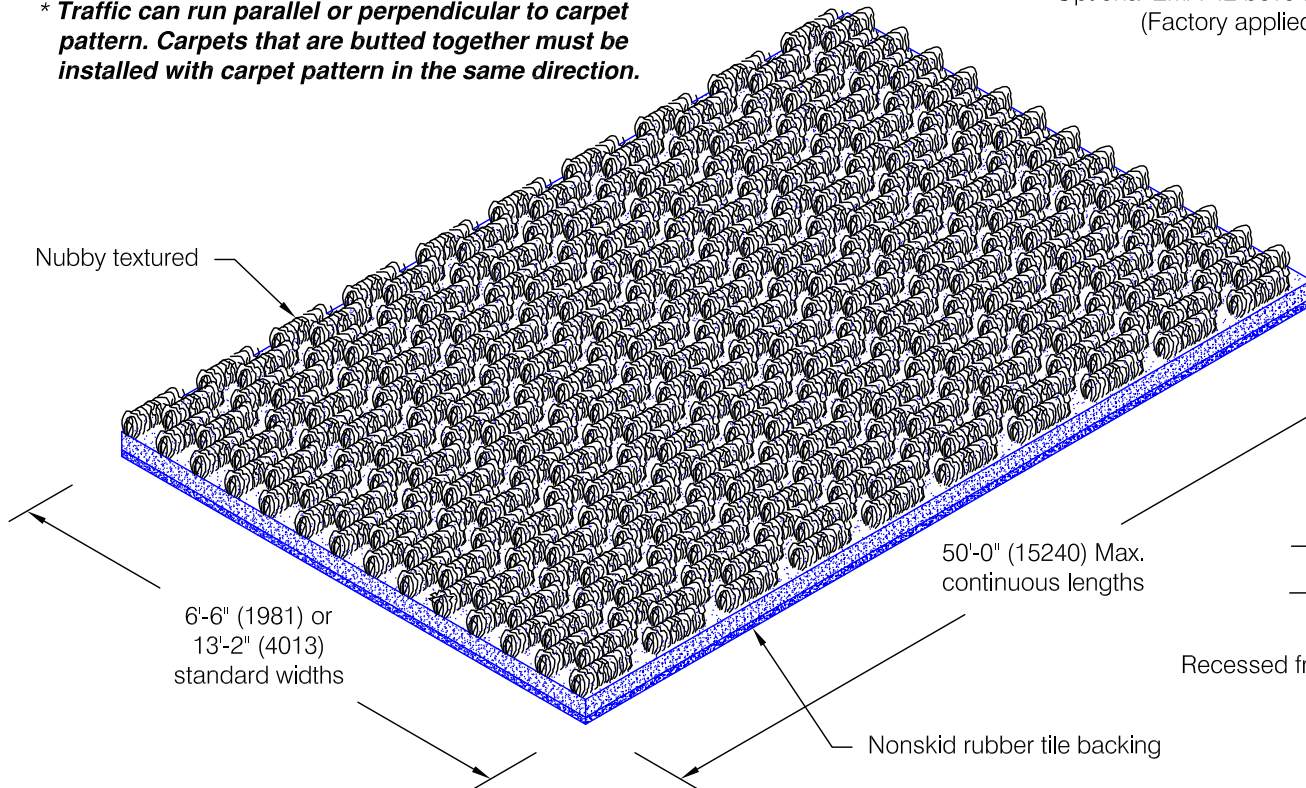

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.49.0e