


EM-800 Rol-Dek[®] Maxi-Tuft Carpet Insert

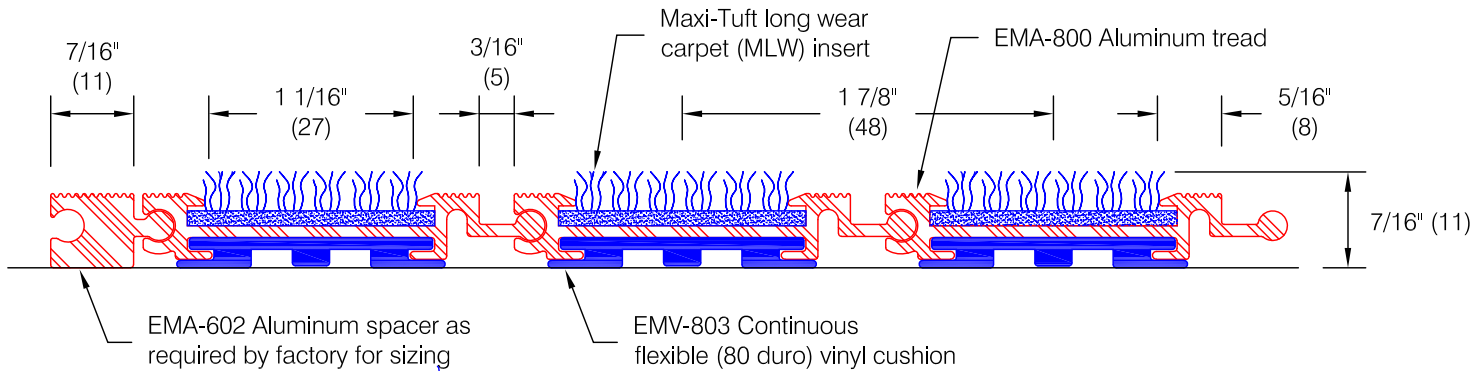


Features:


- Extruded aluminum treads alloy 6063-T6
- Continuous vinyl cushion for superior noise reduction
- Roll-Up for easy cleaning of recess
- Optional perforated hinge for added drainage
- Single section width to 144" (3658)
- Space dyed, 100% polyamide nylon, tetra-lobal fibers, 5/32 (4) pile height, 30 oz/sq yd
- Static Coefficient of Friction (ASTM D-2047-82)
 Dry: 0.87, Wet: 0.87

Optional Framing:


* Pawling requires that exact opening dimensions be provided. Factory will fabricate mats 1/4" (6) smaller than exact opening dimensions to allow for proper fit.

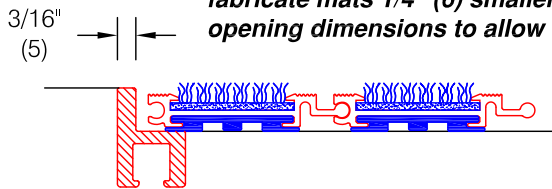

Recessed frame MRF-1002 (see ED.1.0)
 or MRF-1005 (see ED.2.0)

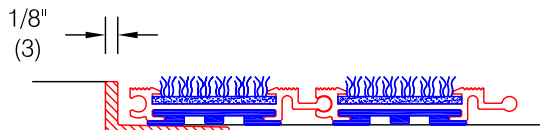


Recessed frame SSF-125 (see ED.3.0)

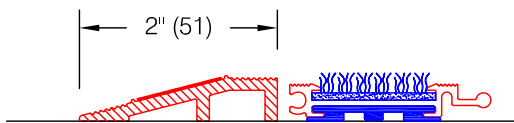


Surface frame BSF-225 (see ED.4.0)

Hinge Details:



Ball & Socket Hinge

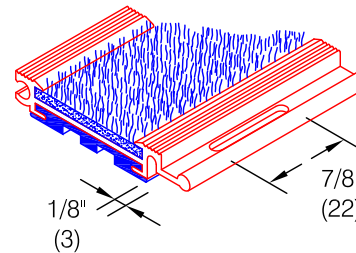

Optional perforated hinge
 (solid hinge standard)

Optional Nosings:



Square vinyl nosing (see ED.20.0)






Beveled vinyl nosing (see ED.21.0)

Finishes:

- Aluminum tread and spacer:
 Mill finish (standard) #405
 Medium bronze anodized #404
 Clear anodized #403
 Black anodized #462
- Vinyl cushion: Black
- Maxi-Tuft long wear carpet insert:
 Manufacturer's standard colors

Sectioning information:

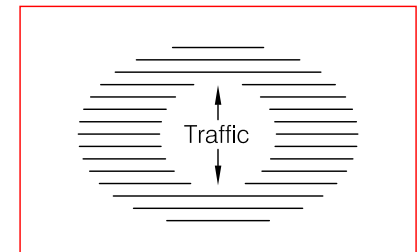

* Mats over 66 square feet may require sectioning as determined by the factory

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

ED.19.0e